



Versa Inside 120

Advantages

- ▶ Flexible, self-adhesive
- ▶ Double-side supply lead for length 3000 / 5000 mm (one cut, two lights), see drawing

Features

- ▶ Low installation height
- ▶ Can be individually cut to length
- ▶ Successor product of Versa Inside 2 + 8

Examples of use

- ▶ Universal application
- ▶ Can be combined with Channelline profiles

Ordering information

- ▶ To find the right combination of light and ballast, please note pictograms in the light catalogue!
- ▶ For possible combinations, see Versa overview
- ▶ For Connector 90° 2 additional direct connectors are required

Technical details in brief



Lamp type:	LED surface-mounted light
Type of lighting:	Functional lighting / accent lighting
Operating voltage:	12 / 24 V DC
Light colour:	Extra warm white / warm white / neutral white / cool white / MultiWhite
Colour rendering index CRI:	> 90
Energy efficiency:	A+
Life span:	85 lm / W 30,000 h (L70)
Power consumption:	9.6 W / m
Max. length at a stretch:	12 V - 3 m 24 V - 5 m
Dimmable:	Yes
Number of LEDs:	120 / m
Beam angle:	70°
Test marks and symbols:	CE ◊ ▽ ▽
Protection rating:	IP 20
Supply lead:	1800 mm
Plug connection:	LED mini M1 / MP2 plug connector
Connection to:	LED ballast

Versa Inside 120


Article	Order no. MultiWhite*	Order no. Extra warm	Order no. Warm white	Order no. Neutral white	Order no. Cool white
1200 mm 24 V	-	55 809 42	55 809 12	55 809 02	55 809 22
3000 mm 12 V	55 808 34*	55 807 44	55 807 14	55 807 04	55 807 24
5000 mm 24 V	-	55 809 43	55 809 13	55 809 03	55 809 23

Accessories (for more accessories, see chapters "Switch systems" and "Ballasts & leads")

Article	Order no.
Direct connector (12 V, max. 36 W / 24 V, max. 72 W)	36 334 01
Direct connector (12 V, max. 36 W / 24 V, max. 72 W) - set (10 units per set)	36 327 01
90° connector (12 V, max. 36 W / 24 V, max. 72 W)	36 335 01
90° connector (12 V, max. 36 W / 24 V, max. 72 W) - set (10 units per set)	36 328 01
Flexible connector 100 mm (12 V, max. 36 W / 24 V, max. 72 W)	36 336 01
Flexible connector 100 mm (12 V, max. 36 W / 24 V, max. 72 W) - (10 units per set)	36 329 01
Feeder 1800 mm for sections (12 V DC, max. 36 W)	36 330 02
Feeder 1800 mm for sections (24 V DC, max. 72 W)	36 330 01
LED ballast 12 V DC, 30 W with flat Euro plug	31 002 07
LED ballast 24 V DC, 75 W with flat Euro plug	31 017 01
M1 extension lead 1800 mm(12 V DC)	36 768 01
MP2 extension lead 1800 mm(24 V DC)	36 177 01
M1 6-way distributor 200 mm (12 V DC)	36 122 07
MP2 6-way distributor (24 V DC)	36 996 01

* for MultiWhite accessories, see chapter "Switch systems"

Light distribution diagram / 70° (length 600 mm)

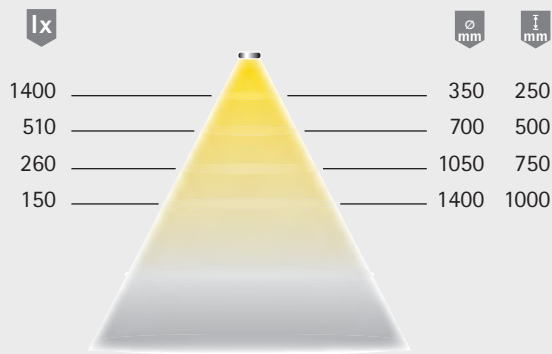


Light box



Dimensional drawing / installation

Light can be cut to size

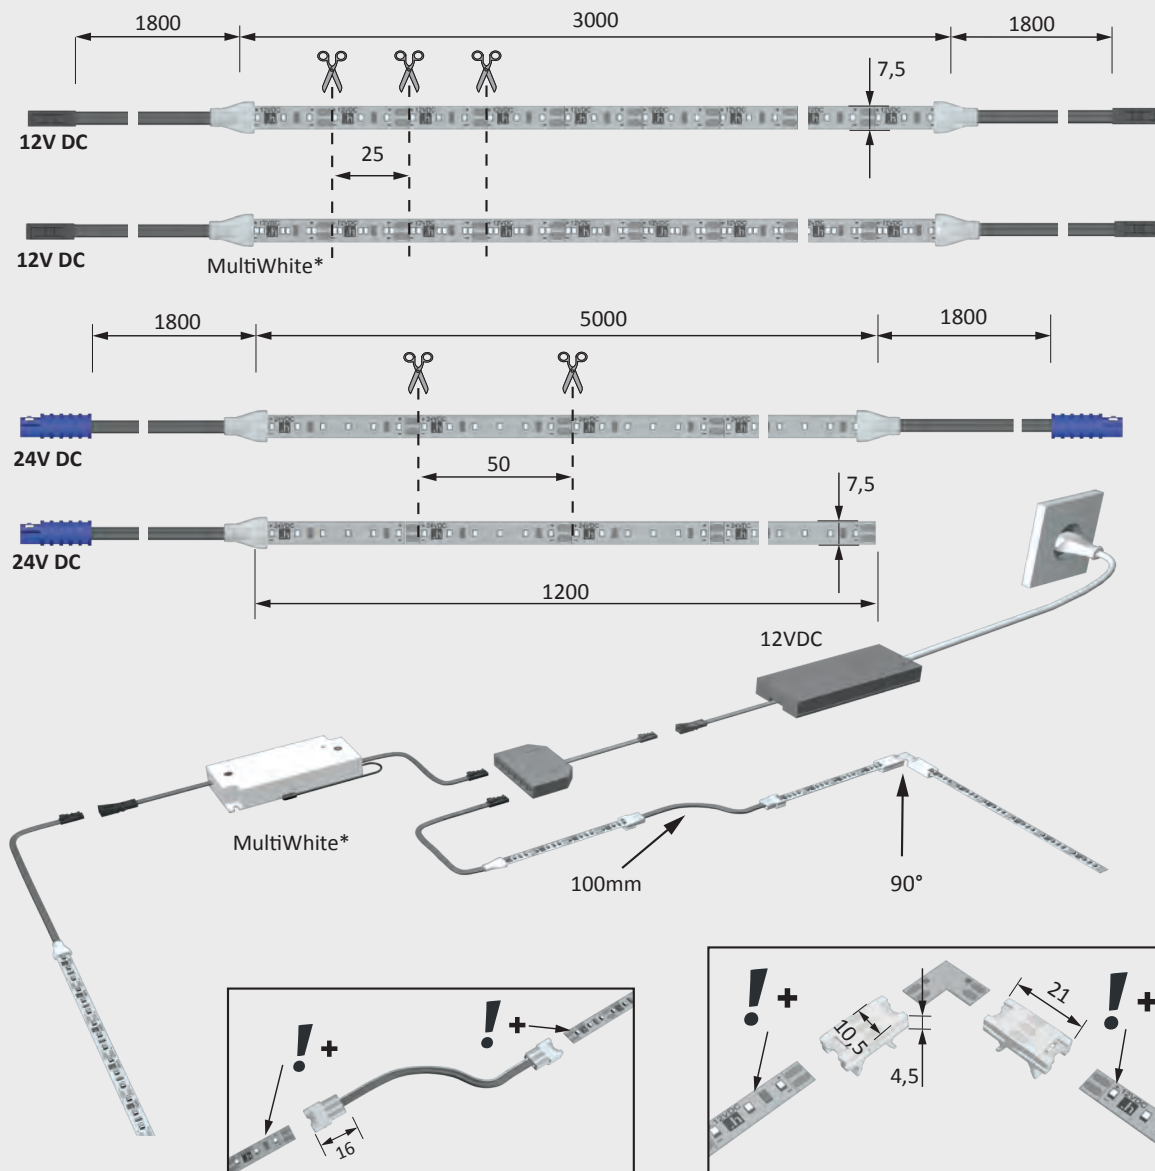

Linear lights