





Light distribution diagram 70°

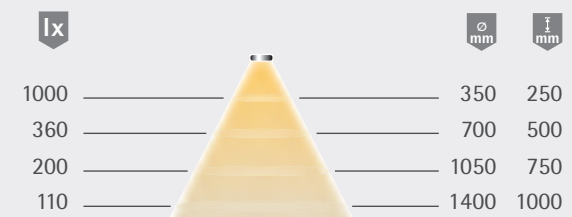

Light box

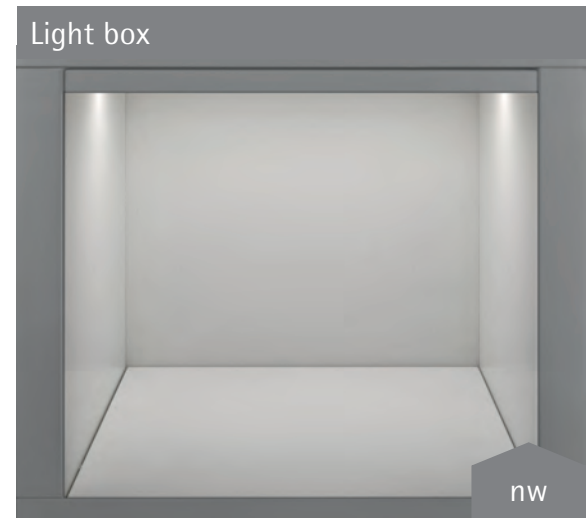

## Versa Inside 80

### Advantages

- ▶ 30 % more uniform light distribution
- ▶ 30 % more efficient
- ▶ 30 % more light
- ▶ 0% more power consumption than the predecessor Versa Inside 60

### Features

- ▶ Lead on both sides for the 5000 mm length (one cut, two lights), see drawing

### Examples of use

- ▶ Universal application
- ▶ Accent lighting in the living area

### Order information

- ▶ Feeders and/or solder leads needed for the 10 m roll
- ▶ For selection see Versa- and Channelline overview

### Technical details



Luminaire type: Surface-mounted light  
 Type of lighting: Accent lighting  
 Operating voltage: 12 V DC  
 Light colours: XtraWarmWhite/ WarmWhite/ NeutralWhite/ CoolWhite/ MultiWhite  
 Colour rendering: RA >90; R9 >60  
 Luminous flux: 600 lm/m  
 Light source efficiency: 125 lm/W  
 Life span: 40,000 h (L70)  
 Power consumption: 4.8 W/m  
 Max. length at a stretch: 7 m  
 Dimmable: Yes/PWM/Smart.home  
 Number of LEDs: 80/m  
 Beam angle: 120°  
 Half value angle: 70°  
 Test marks and symbols: CE, RoHS, Energy Star  
 Supply lead: 1800 mm  
 Plug connector: LED mini connector M1 (max. 36 W)  
 Protection rating: IP 20  
 Connection to: LED ballast

### Versa Inside 80

	MultiWhite*	XtraWarm	WarmWhite	NeutralWhite	CoolWhite
1200 mm (max. 5.8 W)	-	56 001 42	56 001 12	56 001 02	56 001 22
5000 mm (max. 24 W)	56 001 33	56 001 43	56 001 13	56 001 03	56 001 23
10000 mm (max. 4.8 W/m)	56 001 31	56 001 41	56 001 11	56 001 01	56 001 21

### Accessories\*\*

	1 piece	10 piece
Direct connector	36 362 01	36 362 11
Flexible connector 50 mm	36 363 01	36 363 11
Flexible connector 150 mm	36 364 01	36 364 11
Feeder 1800 mm for sections	36 365 01	-
Soldering lead 130 mm for sections	39 297 38	-
Soldering lead 1800 mm for sections	36 248 01	-
LED ballast 15 W with flat Euro plug	30 996 17	-
LED ballast 30 W with flat Euro plug	31 002 07	-
M1 extension lead 1800 mm	36 768 01	-
M1 3-way distributor 180 mm	36 852 01	-

\* MultiWhite accessories required  
 \*\* Further accessories in section Switch systems

Dimensional drawing / installation

Can be individually cut to size

