



Versa Super Plus

Advantages

- ▶ Coated surface protects the LED
- ▶ Double-side supply lead (one cut, two lights), see drawing
- ▶ New bending direction (see drawing)

Features

- ▶ Can be individually cut to length
- ▶ Bends sideways in contrast to standard Versa
- ▶ Evenly illuminated area

Examples of use

- ▶ Bar counters
- ▶ Decorative surfaces with rounded corners

Ordering information

- ▶ To find the right combination of light and ballast, please note pictograms in the light catalogue!
- ▶ For possible combinations, see Versa overview
- ▶ Sales unit: 1 Versa, 2 end caps and 1 tube of silicone to seal cut edges

Technical details in brief



Lamp type:	LED surface-mounted light
Type of lighting:	Accent lighting
Operating voltage:	24 V DC
Light colour:	Extra warm white / warm white / neutral white / cool white
Colour rendering index CRI:	> 85
Energy efficiency:	A
Life span:	53 lm / W
Power consumption:	30,000 h (L70)
Max. length at a stretch:	7.5 W / m
Dimmable:	5 m
Beam angle:	Yes
Test marks and symbols:	70°
Protection rating:	CE ◊ ▼ ▼
Supply lead:	IP 65*
Plug connection:	2 x 1800 mm
Connection to:	LED-MultiPlug MP2
	LED ballast

Versa Super Plus 120


Article	Order no. Extra warm	Order no. Warm white	Order no. Neutral white	Order no. Cool white
2500 mm (max. 18.8 W)	55 815 41	55 815 11	55 815 02	55 815 21
5000 mm (max. 37,5 W)	55 815 40	55 815 10	55 815 01	55 815 20

Accessories (for more accessories, see chapters "Switch systems" and "Ballasts & leads")

Article	Order no.
LED ballast 24 V DC, 75 W with flat Euro plug	31 017 01
LED ballast 24 V DC, 150 W with flat Euro plug	30 017 11
MP2 2-way distributor	39 422 51
MP2 6-way distributor	36 996 01

* only in moulded section of light

Light distribution diagram / 70° (length 600 mm)

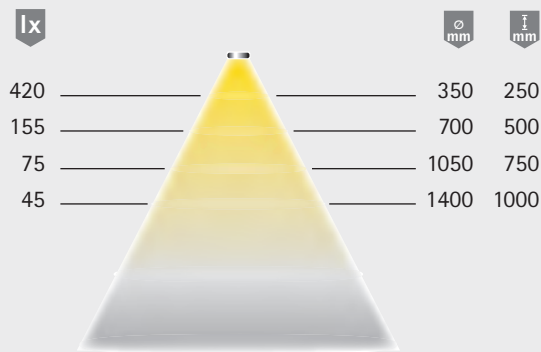

Light box



Dimensional drawing / installation

Light can be cut to size

