



EcoPower Flood

Advantages

- ▶ Entry-level recessed spotlight
- ▶ Compact light
- ▶ Evenly illuminated area

Features

- ▶ Recessed light with 58 mm installed diameter

Examples of use

- ▶ Shelves
- ▶ Display cabinets

Ordering information




- ▶ To find the right combination of light and ballast, please note pictograms in the light catalogue!
- ▶ Sales unit: 1

Technical details in brief



Lamp type: LED recessed light
Type of lighting: Functional / accent lighting
Surface finish: Aluminium look / stainless steel look
Operating voltage: 12 V DC
Light colour: Warm white / neutral white

Colour rendering index CRI: > 80
Energy efficiency: A++
88 lm/W
Life span: 30,000 h (L70)
Power consumption: 1.7 W
Dimmable: Yes
Beam angle: 60°

Test marks and symbols:   
Protection rating: IP 44
Installed diameter: 58 - 61 mm
Supply lead: 2000 mm
Plug connection: LED mini
M1 plug connection
Connection to: LED ballast


EcoPower Flood

Article	Order no.	
	Warm white	Neutral white
Aluminium look	32 341 16	32 341 06
Stainless steel look	32 341 19	32 341 09


Accessories (for more accessories, see chapters "Switch systems" and "Ballasts & leads")

Article	Order no.
Surface-mounted housing in aluminium look	36 240 06
Surface-mounted housing in stainless steel look	36 240 09
LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01


Light distribution diagram / 60°

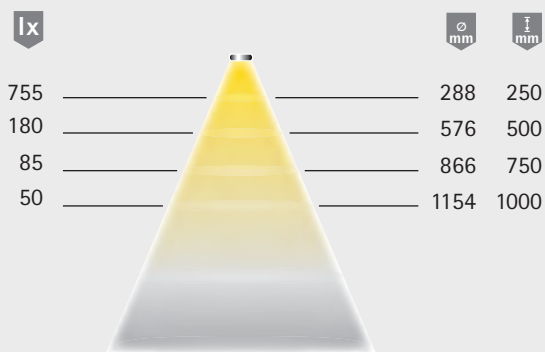

Light box

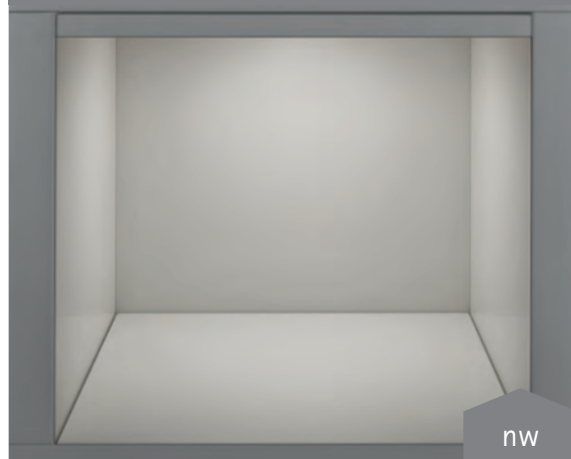

Dimensional drawing / installation

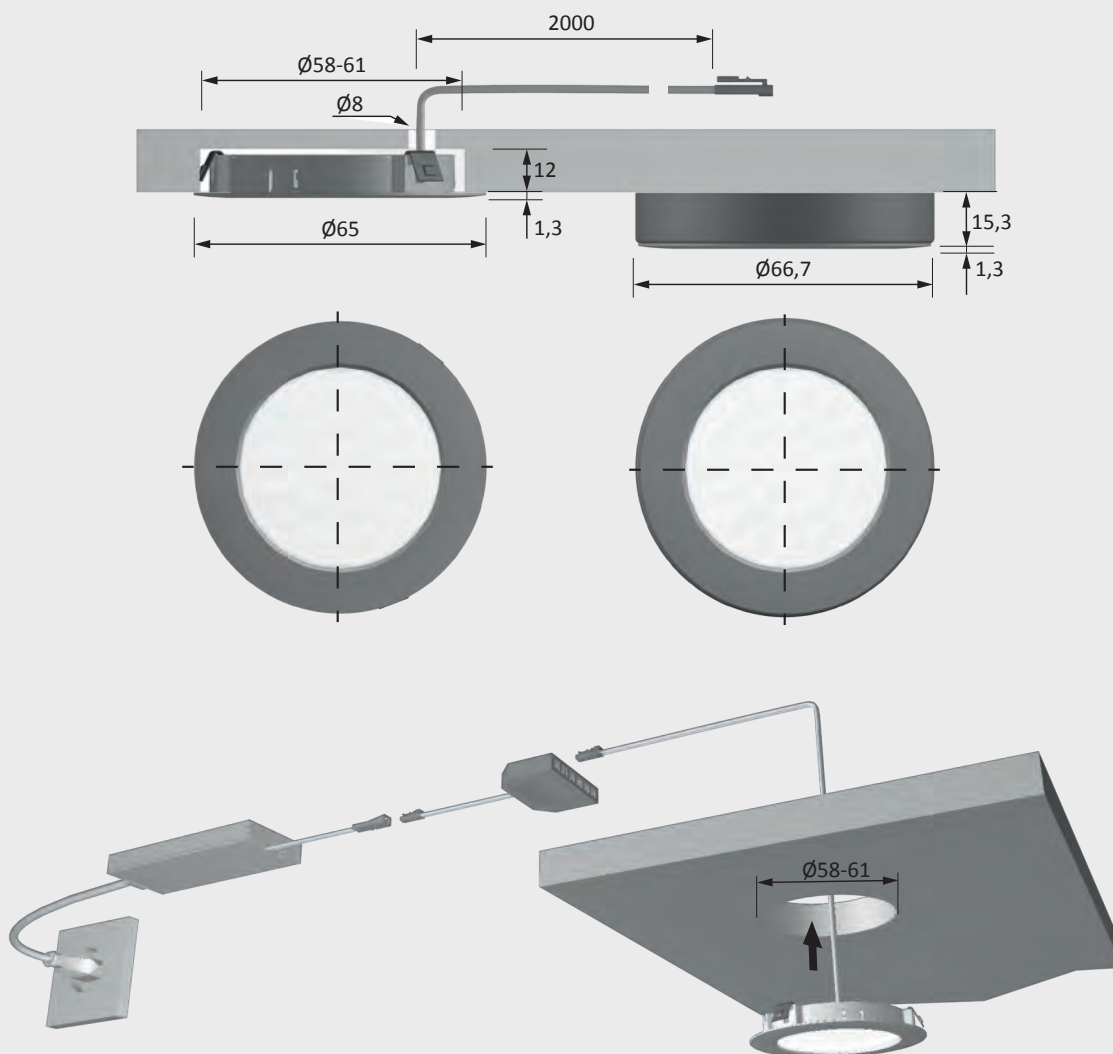

Spotlights