



SlimLine

Advantages

- ▶ Filigree light
- ▶ High brightness
- ▶ Easy to retrofit

Features

- ▶ Surface-mounted

Examples of use

- ▶ On top of wardrobes
- ▶ Above mirrors

Ordering information

- ▶ To find the right combination of light and ballast, please note pictograms in the light catalogue!
- ▶ Sales unit: 1

Technical details in brief




Lamp type:	LED surface-mounted light
Type of lighting:	Functional lighting
Surface finish:	Aluminium look
Operating voltage:	12 V DC
Light colour:	Neutral white
Colour rendering index CRI:	> 80
Energy efficiency:	A
Life span:	65 lm / W 30,000 h (L70)
Power consumption:	max. 11.4 W
Dimmable:	Yes
Beam angle:	70°
Test marks and symbols:	CE ⬠ ▽ ▽
Protection rating:	IP 44 (mounted)
Supply lead:	1800 mm
Plug connection:	LED mini M1 plug connection
Connection to:	LED ballast

SlimLine		
Article	Power consumption	Order no. Neutral white
400 mm	4.8 W	34 200 07
600 mm	7.8 W	34 183 07
900 mm	11.4 W	34 191 07

Accessories (for more accessories, see chapters "Switch systems" and "Ballasts & leads")	
Article	Order no.
LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

Light distribution diagram / 70° (length 600 mm)

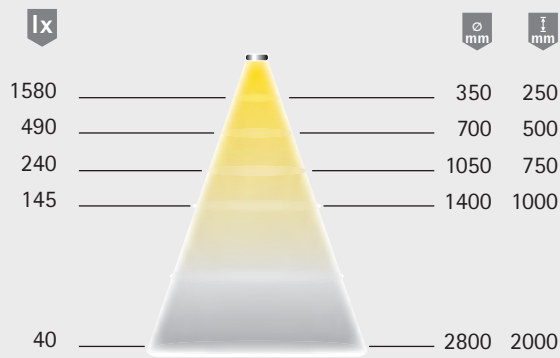

Dimensional drawing / installation

