



Rocker switch

Advantages

- ▶ Simple built-in switch

Examples of use

- ▶ Switching of furniture lights

Ordering information

- ▶ Image above shows SuperDot with rocker switch
- ▶ Sales unit: 1
- ▶ Housing for surface mounted switch must be ordered separately

Technical details in brief



Can be used with:
Surface finish:

Lights
Aluminium look /
black

Operating voltage:

12 V DC /
230-230 V

Test marks and
symbols:

CE ∇ ∇ ∇ ∇ ∇


Plug connection:

LED mini
M1 plug connector /
flat Euro plug

Rocker switch

Article	Surface finish	Voltage	Switching power	Supply lead	Switching lead	Order no.
Rocker switch	Aluminium look	12 V DC	max. 36 W	1800 mm	1800 mm	36 974 81
Rocker switch	Black	220-230 V	max. 400 W	3000 mm	1000 mm	36 218 01
Surface-mounted switch		220-230 V	max. 400 W	2000 mm	2000 mm	36 241 01
Housing	Aluminium look					36 241 06
Housing	Stainless steel look					36 241 09

Dimensional drawing / installation

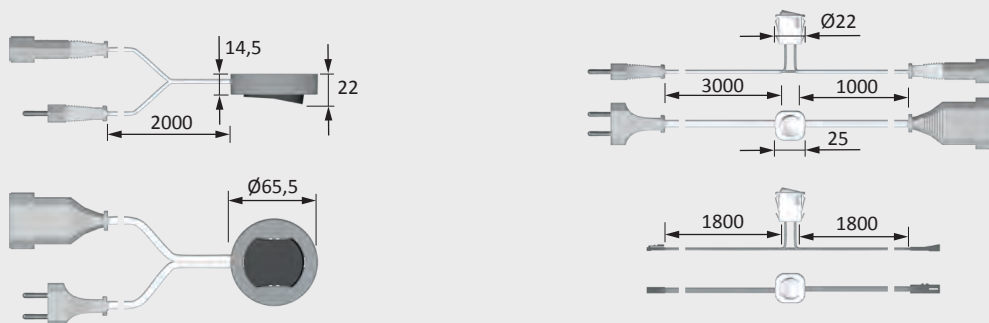



USB socket

Advantages

- ▶ USB charger socket
- ▶ for connection of 2 devices

Features

- ▶ For drill-in mounting
- ▶ Quick charging of mobile and table

Examples of use

- ▶ USB devices

Ordering information

- ▶ Sales unit: 1
- ▶ Ballast must have free capacity of minimum 15 W

Technical details in brief



Type:	Flush installation
Surface finish:	Aluminium look
Operating voltage:	12 V DC
Charging current:	max. 2.1 A
Test marks and symbols:	CE ▽ ▽ ▽ ▽
Plug connection:	LED mini M1 plug connector

USB socket	
Article	Order no.
USB socket	30 574 02

Dimensional drawing / installation

