

Ballast 12 V

Features

- ▶ Short-circuit-proof
- ▶ Overload-protected
- ▶ Temperature-protected

Examples of use

- ▶ For 12 V DC furniture lights

Ordering information

- ▶ The ballast power must be equal to or greater than the total power of the connected consumers

Technical details in brief



For use with:	LED lights
Surface finish:	white
Operating voltage:	100 V AC 240 V AC
Mains frequency:	50 Hz / 60 Hz
Output voltage:	12 V DC
Test marks and symbols:	CE ⚡ ⚠ ⚠
Plug connection	
Primary:	2000 mm with flat Euro plug
Plug connection:	LED mini M1 plug connection

Ballast 12 V DC - 200-240 V AC

Article	Secondary	Order no.
6 W	1-way	30 226 02
15 W	1-way + 6-way distributor	30 996 17
20 W	1-way + 6-way distributor	31 016 01
30 W	1-way + 6-way distributor	31 002 07
30 W (IP 44)	1-way + 6-way distributor	31 018 01
50 W	6fach	30 998 01

Ballast 12 V DC - wide range voltage model 100-240 V AC


Article	Order no.
30 W with 1800 mm flat Euro plug	30 115 01
US lead for wide range voltage model, 1800 mm	39 340 21
UK lead for wide range voltage model, 1800 mm	39 340 22
AUS lead for wide range voltage model, 1800 mm	39 340 27

Ballast 12 V DC - dimmable* 220-240 V AC

Article	Order no.
5- 30 W (observe minimum power load)	30 586 01

* for use with phase or reverse phase dimmers, not compatible with repeaters.
Device list: www.halemeier.de

Dimensional drawing / installation

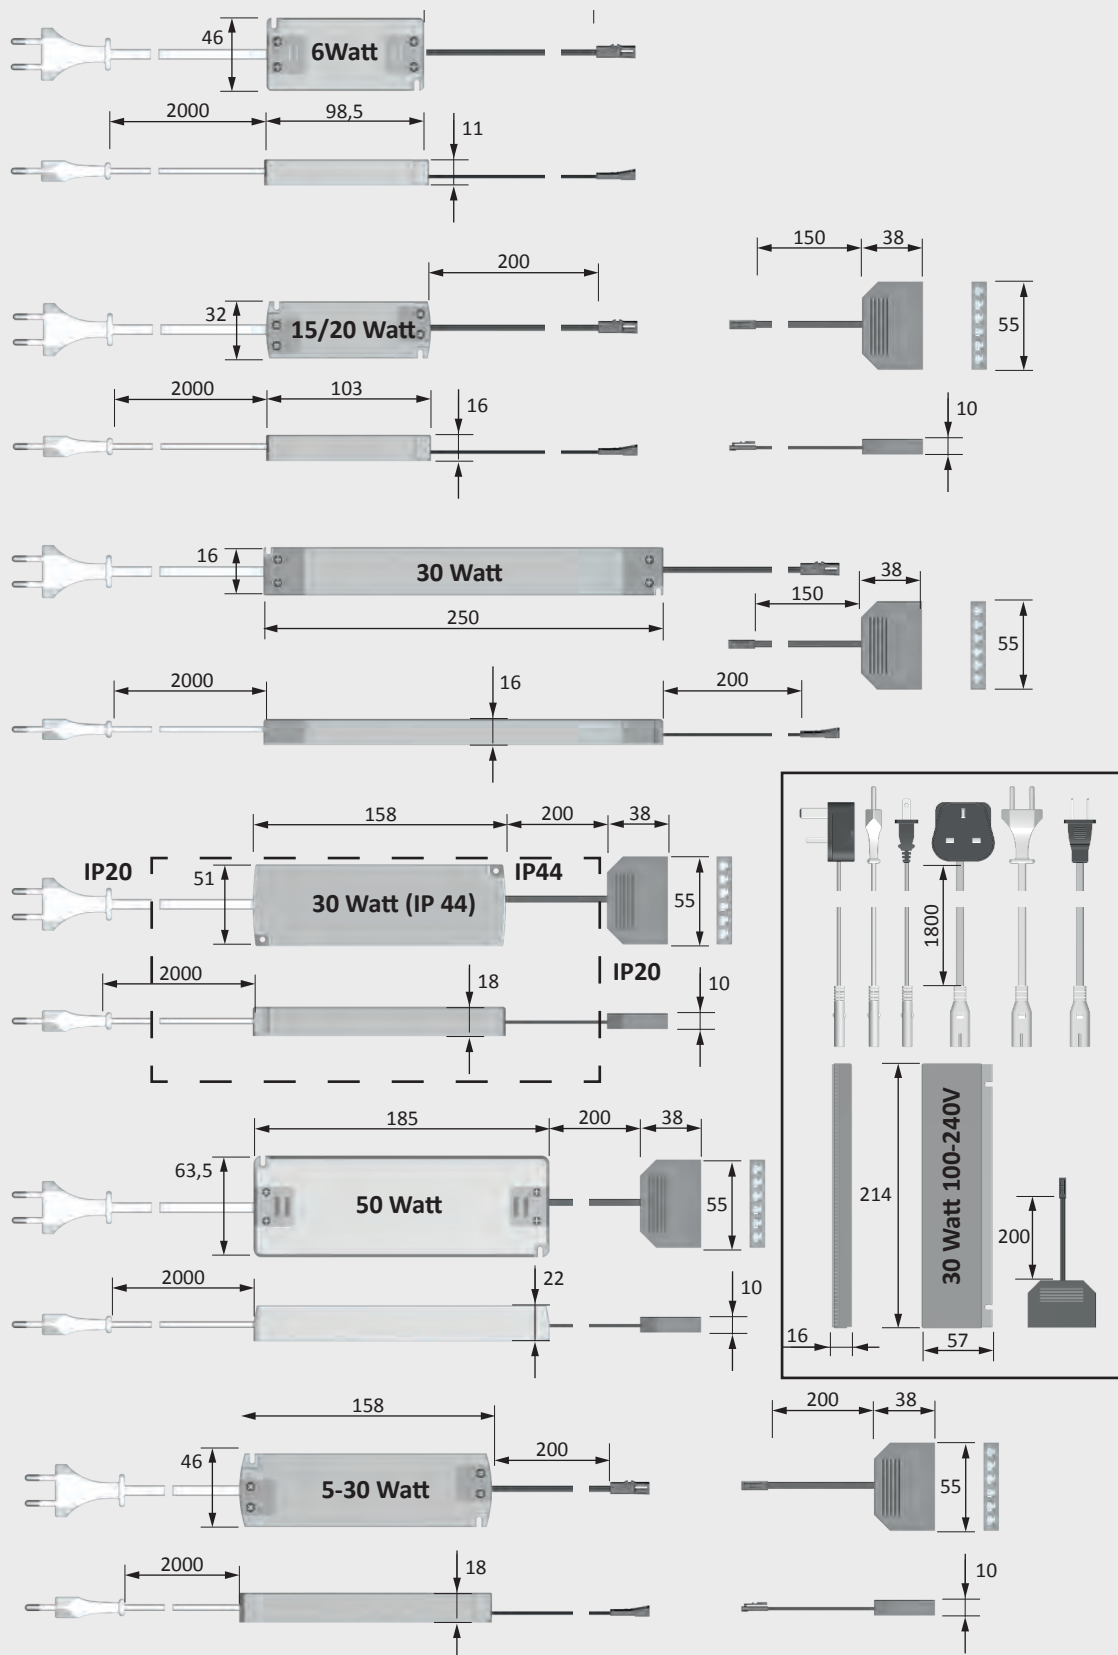

Ballasts & leads