





Light distribution diagram / 70° (length 600 mm)


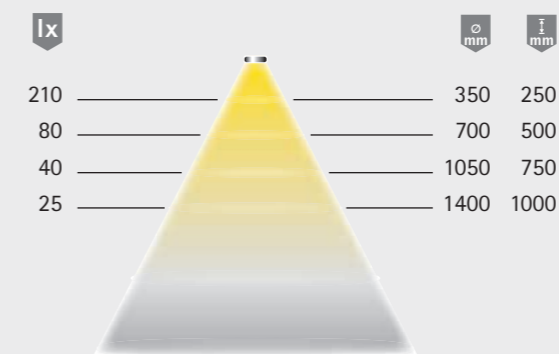


Light box

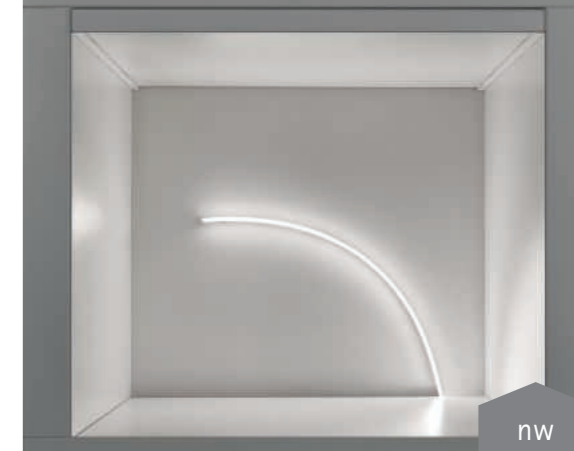

Dimensional drawing / installation

Light can be cut to size

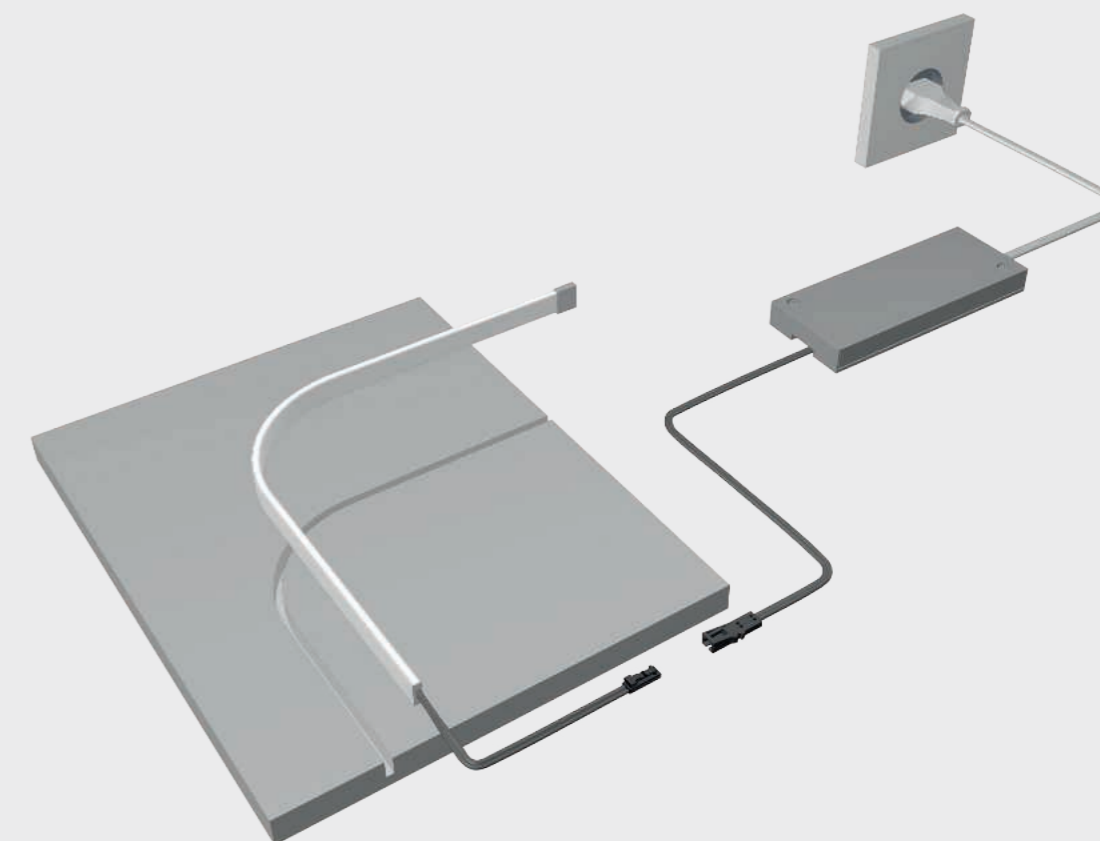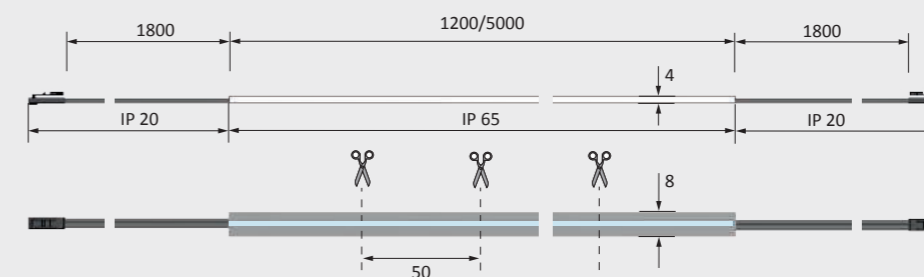

Versa Super Plus Mini

Advantages

- ▶ Coated surface protects the LED
- ▶ Double-side supply lead (one cut, two lights), see drawing
- ▶ New bending direction (see drawing)

Features

- ▶ Can be individually cut to length
- ▶ In contrast to standard Versa, bends to the side
- ▶ Evenly illuminated area
- ▶ Particularly narrow

Examples of use

- ▶ Bar counters
- ▶ Decorative surfaces with rounded corners
- ▶ Trend design

Ordering information

- ▶ Sales unit: 1 Versa, 2 end caps and 1 tube of silicone to seal cut edges

Technical details in brief



Lamp type: LED surface-mounted/recessed light
 Type of lighting: Accent lighting
 Operating voltage: 12 V DC
 Light colour: Warm white / neutral white
 Colour rendering index CRI: > 85
 Energy efficiency: A
 Life span: 30,000 h (L70)
 Power consumption: 4.8 W / m
 Max. length at a stretch: 5 m
 Dimmable: Yes / PWM
 Half-peak-angle: 70°
 Test marks and symbols: CE, RoHS, WEEE
 Protection rating: IP 65*
 Supply lead: 2 x 1800 mm
 Plug connection: LED mini
 M1 plug connector
 LED ballast

Versa Super Plus Mini

Article	Order no.	
	WarmWhite	NeutralWhite
1200 mm (max. 5.8 W)	55 864 12	55 864 02
5000 mm (max. 24 W)	55 864 13	55 864 03

Accessories (additional accessories in the "Licht im Moebel" main catalogue)

Article	Order no.
LED ballast 15 W with flat Euro plug	30 996 17
LED ballast 30 W with flat Euro plug	31 002 07
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01

* only in moulded section of light

QUESTIONS? Please call our service team or write to us by e-mail