



MiniFlat Plus

Advantages

- ▶ Designer light
- ▶ Evenly illuminated area

Features

- ▶ Recessed light with 56 mm installed diameter
- ▶ Designed to match Swing and S-Flat lights
- ▶ Powerful successor of MiniFlat light

Examples of use

- ▶ Shelves
- ▶ Display cabinets
- ▶ Niches

Ordering information

- ▶ To find the right combination of light and ballast, please note pictograms in the light catalogue!
- ▶ Sales unit: 1




Technical details in brief



Lamp type: LED recessed light
 Type of lighting: Functional / accent lighting
 Surface finish: Aluminium look
 Operating voltage: 12 V DC
 Light colour: Warm white / neutral white

Colour rendering index CRI: > 80
 Energy efficiency: A+
 65 lm/W

Life span: 30,000 h (L70)
 Power consumption: 3.5 W
 Dimmable: Yes
 Beam angle: 60°

Test marks and symbols:    
 Protection rating: IP 20
 Installed diameter: 54-56 mm
 Supply lead: 2000 mm
 Plug connection: LED mini
 M1 plug connection
 Connection to: LED ballast


MiniFlat Plus

Article	Order no.	Order no.
	Warm white	Neutral white
Aluminium look	32 151 16	32 151 06

Accessories (for more accessories, see chapters "Switch systems" and "Ballasts & leads")

Article	Order no.
LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

Light distribution diagram / 60°

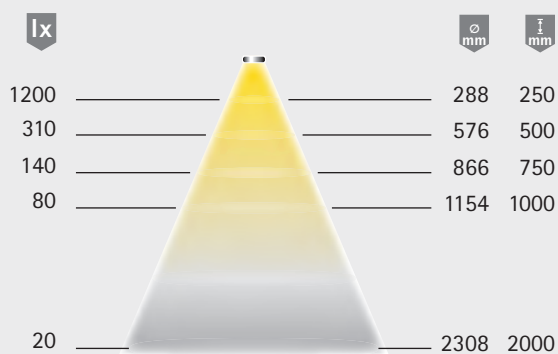

Light box



Dimensional drawing / installation

