



MultiLite Flood

Advantages

- ▶ Designer light
- ▶ Evenly illuminated area

Features

- ▶ High light output in relation to size
- ▶ Plug-in connection on housing
- ▶ Recessed light with 58 mm installed diameter

Examples of use

- ▶ Shelves
- ▶ Display cabinets

Ordering information

- ▶ Individual lights are supplied without cover ring
- ▶ To find the right combination of light and ballast, please note pictograms in the light catalogue!
- ▶ Sales unit: 1

Technical details in brief



12 V

Lamp type:	LED recessed light
Type of lighting:	Functional / accent lighting
Surface finish:	Aluminium look / chrome
Operating voltage:	12 V DC
Light colour:	Warm white / neutral white
Colour rendering index CRI:	85
Energy efficiency:	A
	50 lm/W
Life span:	30,000 h (L70)
Power consumption:	4 W
Dimmable:	Yes
Beam angle:	60°
Test marks and symbols:	CE ◊ ▽ ▽
Protection rating:	IP 44
Installed diameter:	58 mm
Supply lead:	2000 mm
Plug connection:	LED mini M1 plug connection
Connection to:	LED ballast

MultiLite Flood


Article	Order no. MultiWhite*	Order no. Warm white	Order no. Neutral white
Individual light	32 066 31*	32 150 11	32 150 01

Accessories (for more accessories, see chapters "Switch systems" and "Ballasts & leads")


Article	Order no.
Cover ring - aluminium look	25 175 26
Cover ring - chrome, matte	25 175 16
Cover ring - stainless steel look	25 175 09
Cover ring - gold look	25 175 04
Cover ring - bronzed	25 175 02
LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

* for MultiWhite accessories, see chapter "Switch systems"

Light distribution diagram / 60°

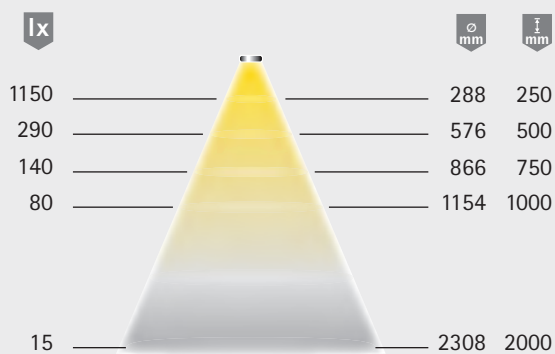

Light box

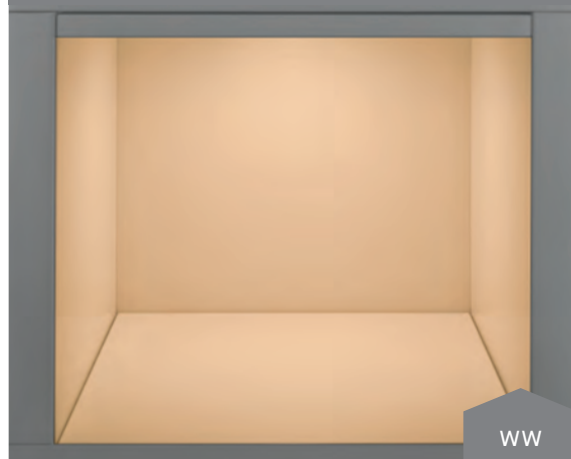

Dimensional drawing / installation

