





Light distribution diagram 50°

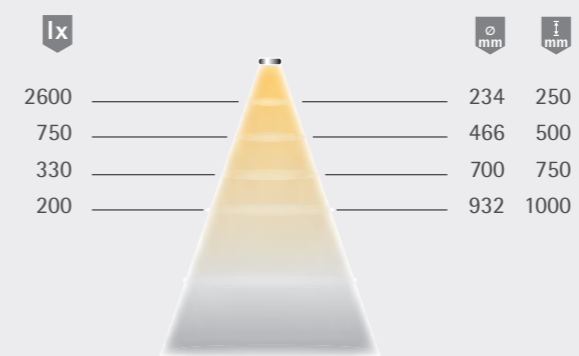

Light box

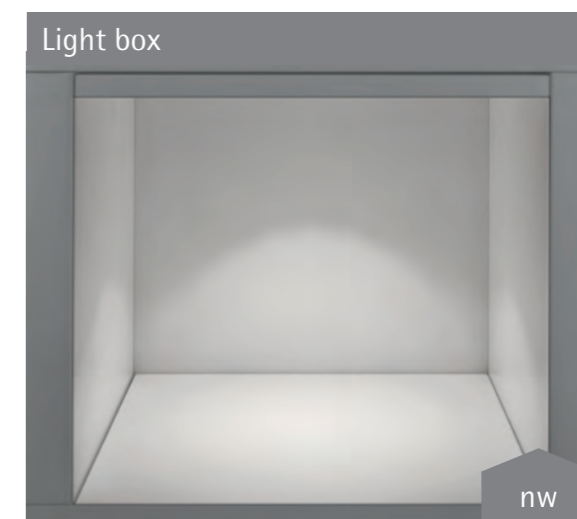

PowerLite Plus

Advantages

- ▶ Cone of light like halogen spot
- ▶ High-quality metal housing
- ▶ Bright versatile luminaire

Features

- ▶ High light output in relation to size
- ▶ Plug-in connection on housing
- ▶ Recessed luminaire for 58 mm mounting diameter

Examples of use

- ▶ Kitchen niches and top floors
- ▶ Shelves
- ▶ Display cabinets

Order information

- ▶ With direct connection of a MultiWhite luminaire to an electronic ballast, the light colour is XtraWarmWhite (2700K)

Technical details



Luminaire type: LED recessed light
 Type of lighting: Functional / accent lighting
 Surface finish: Stainless steel look
 Operating voltage: 12 V DC
 Light colour: WarmWhite/ NeutralWhite/ MultiWhite
 Colour rendering: RA >85
 Luminous flux: 160 lm
 Luminaire efficiency: 45 lm/W
 Light source efficiency: 60 lm/W
 Life span: 40,000 h (L70)
 Power consumption: 3.5 W
 Dimmable: Yes/PWM/Smart.home
 Beam angle: 90°
 Half value angle: 50°
 Test marks and symbols: CE, ENEC, DALI, DALI-2
 Protection rating: IP 44
 Installed diameter: 56-58 mm
 Supply lead: 3000 mm
 Plug connector: LED mini M1 plug connector
 Connection to: LED ballast

PowerLite Plus

	MultiWhite*	WarmWhite	NeutralWhite
Stainless steel look	32 063 31	32 063 19	32 063 09

Accessories**

LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

* MultiWhite accessories required
 ** Further accessories in section Switch systems

Dimensional drawing / installation

