




Light distribution diagram 60°

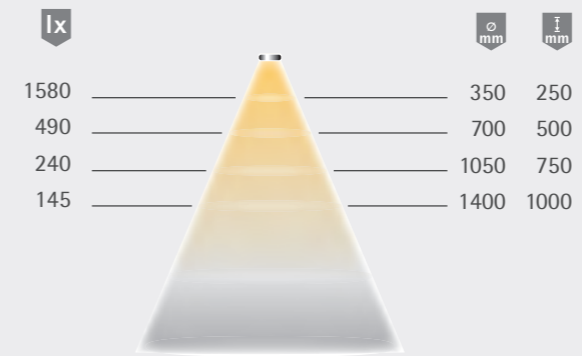

SlimLine

Advantages

- ▶ Filigree light
- ▶ Mounts almost invisibly
- ▶ Also easy to retrofit

Features

- ▶ Surface-mounted
- ▶ High brightness

Examples of use

- ▶ On top of wardrobes
- ▶ Above mirrors

Order information

- ▶ For connection to the house installation we recommend our dimmable electronic ballasts or smart receivers.

Technical details



Luminaire type: surface-mounted light
Type of lighting: Functional lighting
Surface finish: Aluminium look
Operating voltage: 12 V DC
Light colour: NeutralWhite
Colour rendering: RA >80
Luminous flux: 310 lm/500 lm/740 lm
Luminaire efficiency: 65 lm/W
Light source efficiency: 90 lm/W
Life span: 40,000 h (L70)
Power consumption: max. 11.4 W
Dimmable: Yes/PWM/Smart.home
Beam angle: 120°
Half value angle: 60°
Test marks and symbols: CE
Protection rating: IP 44 (mounted)
Supply lead: 1800 mm
Plug connector: LED mini
Connection to: LED ballast

SlimLine

	NeutralWhite
400 mm (4.8 W)	34 200 07
600 mm (7.8 W)	34 183 07
900 mm (11.4 W)	34 191 07

Accessories*

LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

* Further accessories in section Switch systems/Ballasts and leads

Dimensional drawing / installation

