




Light distribution diagram 70°



Light box

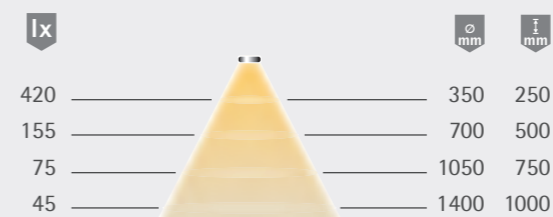

Versa SuperPlus

Advantages

- ▶ Evenly illuminated area
- ▶ Lateral bending direction (see drawing)
- ▶ Flush mounting possible
- ▶ Can be individually cut to size

Features

- ▶ Protection against water jets from all directions (IP 65)
- ▶ Suitable for damp locations
- ▶ Supply lead on both sides (one cut, two lights), see drawing

Examples of use

- ▶ Round counters
- ▶ Decorative surfaces with visible curves
- ▶ Particularly narrow cabinet interior lighting

Order information

- ▶ Packaging unit consists of 1 piece Versa, 2 end caps and a silicone tube for sealing in wet room applications

Versa Super Plus

	WarmWhite	NeutralWhite
2500 mm (max. 18.8 W)	55 815 11	55 815 02
5000 mm (max. 37.5 W)	55 815 10	55 815 01
Sample piece 1000 mm (max. 7.5 W)	55 815 15	55 815 05

Accessories*


LED ballast with Euro flat plug (75 W)	31 017 01
LED ballast with Euro flat plug (150 W)	30 017 11
MP2 2-way distributor	39 422 51
MP2 6-way distributor	36 996 01

Technical details



Luminaire type: Surface-mounted light
Type of lighting: Accent lighting
Operating voltage: 24 V DC
Light colours: WarmWhite/NeutralWhite
Colour rendering: RA >80
Luminous flux: 400 lm/m
Light source efficiency: 53 lm/W
Life span: 40,000 h (L70)
Power consumption: 7.5 W/m
Max. length at a stretch: 5 m
Dimmable: Yes/PWM/Smart.home
Beam angle: 120°
Half value angle: 70°
Test marks and symbols: CE, RoHS, Energy Star
Protection rating: IP 65 (Only in the gated area)
Supply lead: 2 x 1800 mm
Plug connector: LED MultiPlug MP2 (max. 192 W)
Connection to: LED ballast

Dimensional drawing / installation

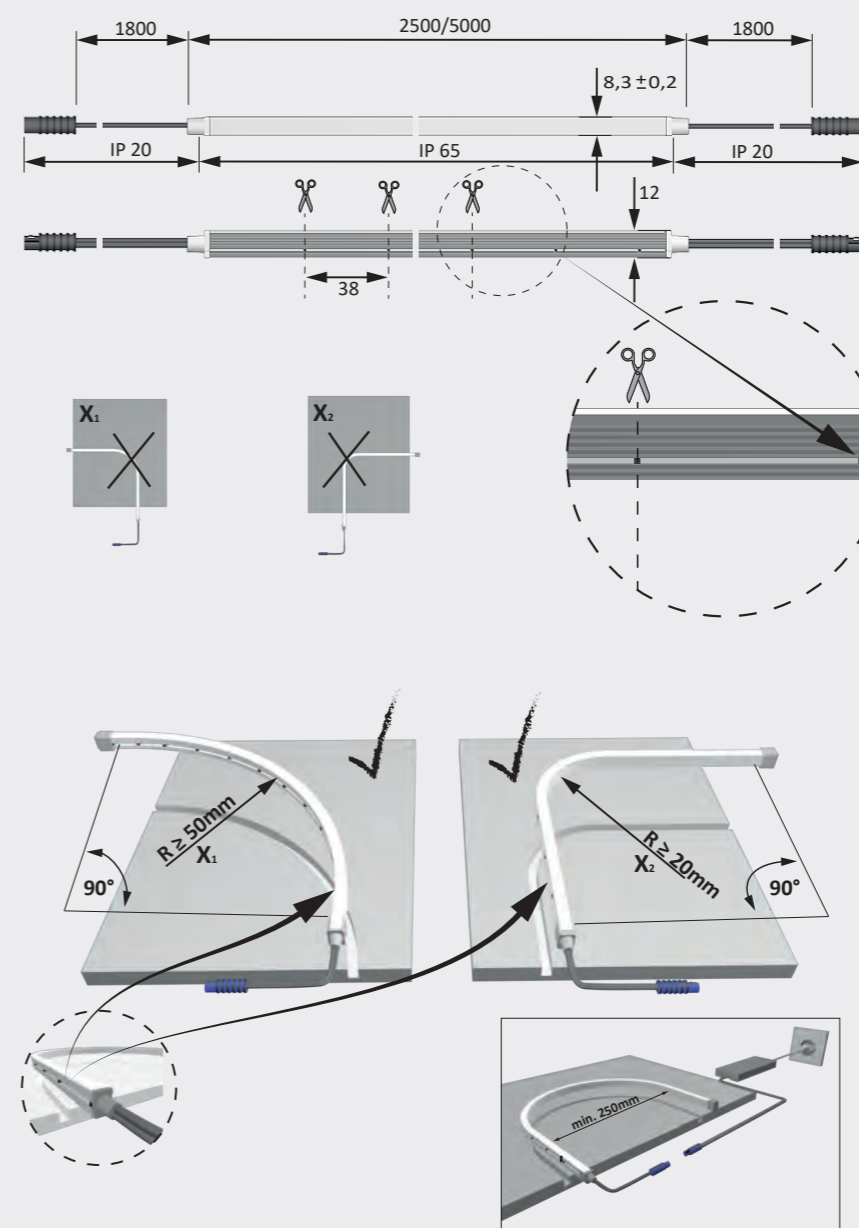

* Further accessories in section Switch systems