

ChannelLine G

Product advantages

- ▶ Recessed/surface-mounted profile
- ▶ Glare-free and angled light emission
- ▶ For flush mounting

- ▶ Opal cover very little change in light colour and high break resistance
- ▶ Homogeneous light line with Versa Inside from 120 LED/m with opal diffuser
- ▶ Inclined beam angle of approx. 90°

Application

- ▶ Cabinet interior lighting
- ▶ Retrofitting in kitchen niches
- ▶ Product presentation on sales shelf

Order information

▶ Two Versa Inside can be installed - one radiates diagonally and one straight out of the profile



Recommended for:

Versa Linear 600 Versa Linear 1200




ChannelLine G

| | Aluminium / Opal | Black / Opal |
|------------------------------|---------------------|--------------|
| 2500 mm | 55 875 51 | 55 875 55 |
| 2500 mm (set of 10) | 55 875 61 | 55 875 65 |
| 3000 mm | 55 875 02 | 55 875 06 |
| 3000 mm (set of 10) | 55 875 12 | 55 875 16 |
| End cap (set of 2) lacquered | 25 554 01 | 25 554 05 |

Accessories

| Double-sided adhesive tape, 16x0.5 mm | 36 261 02 |
|---------------------------------------|-----------|
| Cover profile dark 2000 mm | 25 791 98 |
| Cover profile dark 3000 mm | 25 791 99 |

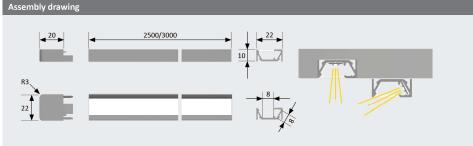

ChannelLine G2

Product advantages

- ▶ Recessed/surface-mounted profile
- ▶ Glare-free and angled light emission
- ▶ With filigree profile trim

- ▶ Opal cover very little change in light colour and high break resistance
- ▶ Homogeneous light line with Versa from 120 LED/m
- ▶ Inclined beam angle of approx. 90°

Application

- ▶ Cabinet interior lighting
- ▶ Kitchen midway sections
- ▶ Product presentation on sales shelf

Order information

▶ Two Versa Inside can be installed - one radiates diagonally and one straight out of the profile

Recommended for:

Technical details

Versa Linear 600 Versa Linear 1200



ChannelLine G2

| Aluminium / Opal | Black / Opal |
|---------------------|--|
| 55 876 51 | 55 876 55 |
| 55 876 61 | 55 876 65 |
| 55 876 02 | 55 876 06 |
| 55 876 12 | 55 876 16 |
| 25 556 01 | 25 556 05 |
| | Opal 55 876 51 55 876 61 55 876 02 55 876 12 |

Accessories

| Installation spring (2 units per set) | 25 607 01 |
|---------------------------------------|-----------|
| Cover profile dark 2000 mm | 25 791 98 |
| Cover profile dark 3000 mm | 25 791 99 |

Assembly drawing

