

ChannelLine i

Product advantages

- High-quality recessed/surface-mounted profile
- Almost rimless illuminated surface
- For flush mounting
- Filigree profile for thin materials

Features

- Very wide beam angle of approx. 100°

Application

- Flush with cabinet sides or shelves
- Retrofitting in niches

ChannelLine i

	Aluminium / Opal	Black / Opal
2500 mm	55 874 51	55 874 55
2500 mm (set of 10)	55 874 61	55 874 65
3000 mm	55 874 02	55 874 06
3000 mm (set of 10)	55 874 12	55 874 16
End cap (set of 2) lacquered	25 563 01	25 563 05

Accessories

	1 piece	10 piece
Double-sided adhesive tape, 9x0.5 mm	36 261 01	-
Cover profile dark 2000 mm	25 850 02	25 850 60
Cover profile dark 3000 mm	25 850 03	25 850 62

Technical details




Recommended for:

Versa Linear 600
Versa Linear 1200



Assembly drawing

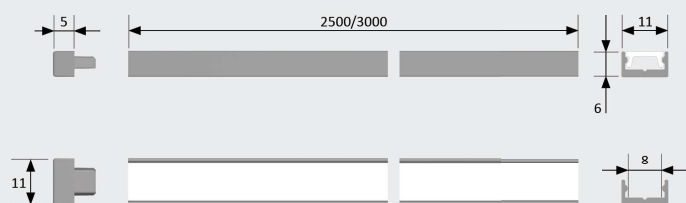

ChannelLine i2

Product advantages

- High quality recessed profile
- With filigree profile trim
- Glare-free and concentrated light emission

Features

- Homogeneous light line with Versa Inside from 160 LED/m with opal diffuser
- Narrow beam angle of approx. 35°

Application

- Accent lighting in display cabinets or shelves
- Stair steps

ChannelLine i2

	Aluminium / Opal	Black / Opal
2500 mm	55 887 51	55 887 55
2500 mm (set of 10)	55 887 65	55 887 61
3000 mm	55 887 02	55 887 06
3000 mm (set of 10)	55 887 12	55 887 16
End cap (set of 2) lacquered	25 799 01	25 799 05

Accessories

	1 piece	10 piece
Cover profile dark 2000 mm	25 850 02	25 850 60
Cover profile dark 3000 mm	25 850 03	25 850 62

Technical details




Recommended for:

Versa Linear 600
Versa Linear 1200
Versa Inside 1200



Assembly drawing

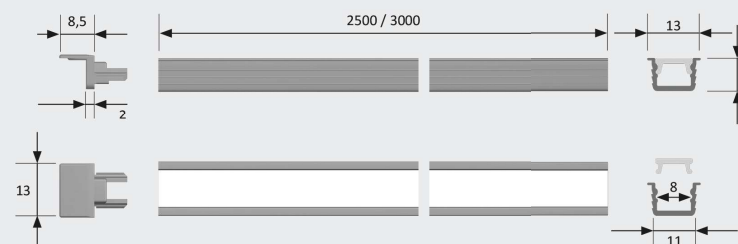



ChannelLine i3

Product advantages

- ▶ High quality deep recessed profile
- ▶ Almost rimless illuminated surface
- ▶ Glare-free and concentrated light emission
- ▶ For flush mounting

Features

- ▶ Homogeneous light line with Versa Inside from 120 LED/m
- ▶ Narrow beam angle of approx. 35°

Application

- ▶ Accent lighting in display cabinets or shelves
- ▶ Flush with storage surfaces on the wall

Technical details



Recommended for:

Versa Inside 600
Versa Inside 1200




ChannelLine i3

	Aluminium / Opal
2500 mm	55 608 51
2500 mm (set of 10)	55 608 61
3000 mm	55 608 02
3000 mm (set of 10)	55 608 12
End cap (set of 2) lacquered	25 985 01

Accessories

	1 piece	10 piece
Double-sided adhesive tape, 9x0.5 mm	36 261 01	-
Cover profile dark 2000 mm	25 850 02	25 850 60
Cover profile dark 3000 mm	25 850 03	25 850 62

Assembly drawing

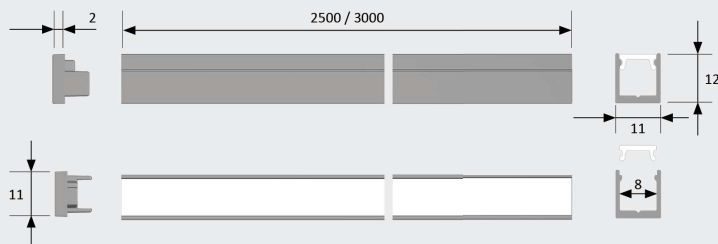

ChannelLine F

Product advantages

- ▶ Versatile
- ▶ Entry-level price

Features

- ▶ Beam angle and homogeneity can be varied with the milling depth

Application

- ▶ For milling into the wood

Order information

- ▶ Use of feeders and connectors in the profile possible

Technical details



Recommended for:

Versa Inside 600
Versa Inside 1200



ChannelLine F

	Opal
2500 mm	55 664 51
3000 mm	55 664 02
3000 mm (set of 10)	55 641 13

Assembly drawing

