



SideSpot 35

Product advantages

- Accentuation by light from below/side
- Can be used without glare

Features

- Oblique light emission
- Recessed light for 35 mm installation diameter

Application

- Shelves
- Display cabinets
- Cabinet sides and shelves

Order information

- When a MultiWhite luminaire is connected directly to a ballast, the light colour is XtraWarmWhite; when using the adapter, the light colour is cool white.

SideSpot 35

	MultiWhite	XtraWarm
Black	32 171 35	32 171 35

Accessories

Ballast 20 W with Euro flat plug (6-way distributor)	31 016 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01
M1 extension lead 1800 mm	36 768 01
MultiWhite colour change adapter XW/CW	39 304 40


Technical details



12V

Luminaire type:	Recessed light
Type of lighting:	Functional/ accent lighting
Surface finish:	Black
Operating voltage:	12 Volt DC
Light colour:	XtraWarm/ MultiWhite
Colour rendering:	> 80 Ra
Luminous flux:	50 lm
Luminaire efficiency:	30 lm/W
Light source efficiency:	45 lm/W
Life span:	40,000 h (L80/B10)
Power consumption:	max. 1.4 W
Dimmable:	PWM
Beam angle:	90°
Half value angle:	60°
Test marks and symbols:	CE
Protection rating:	IP 20
Installed diameter:	35 mm
Supply lead:	1800 mm
Plug connector:	Mini connector M1

Light distribution diagram 60° - measured in black room

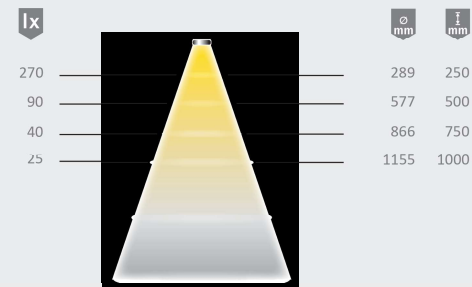

Assembly drawing

