



## Versa Fix 8x12

### Product advantages

- Evenly illuminated area
- Lateral bending direction (see drawing)
- Flush mounting possible
- Can be individually shortened every 33 mm

### Features

- Protection against water jets from all directions (IP 65)
- Suitable for damp locations
- Double-side supply lead (one cut, two lights), see drawing

### VersaFix 8x12

	WarmWhite	NeutralWhite
2500 mm (max. 18.75 W)	56 025 12	56 025 02
5000 mm (max. 37.5 W)	56 025 11	56 025 01

### Accessories

Ballast 30 W with Euro flat plug (1-way + 6-way distributor)	31 002 07
M1 extension lead 1800 mm	36 768 01


### Application

- Round counters
- Decorative surfaces with visible curves
- Extra narrow cabinet interior lighting

### Order information


- Packaging unit consists of 1 piece of Versa, 2 end caps and a silicone tube for sealing for damp room applications

### Technical details



Luminaire type:	Recessed light
Type of lighting:	Accent lighting
Surface finish:	White
Operating voltage:	12 Volt DC
Light colour:	Neutral White/ Warm White
Colour rendering:	> 80 Ra
Luminous flux:	380 - 420 lm/m
Light source efficiency:	max. 56 lm/W
Life span:	40,000 h (L80/B10)
Power consumption:	max. 7.5 W/m
Max. length at a stretch:	5 m
Dimmable:	PWM
Beam angle:	120°
Half value angle:	70°
Test marks and symbols:	CE
Protection rating:	IP 65
Supply lead:	1800 mm
Plug connector:	Mini connector M1

Light distribution diagram 70° - measured in black room

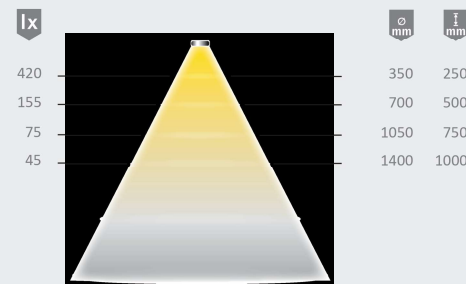

Light box



Assembly drawing

Can be shortened individually

